
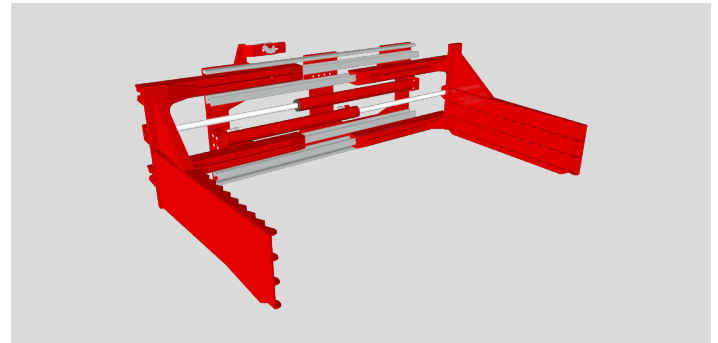


Clamp with wavy edged arms, suggested to customers who need to move any type of voluminous loads. The clamping force, which can be set through hydraulic valve, allows a safe movement of the load. A pressure relief valve, a non-return valve and a regenerative valve are supplied as standard on each model. Min. and Max. openings can be adapted to different needs, as arms dimension and length. Side shifting valve and semi-integral sideshift available on request.

116.130 BALE CLAMP WITH WAVY EDGED ARMS

REFERENCE	ATTACHMENT CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 FEM	FRAME WIDTH (A) mm	OPENING RANGE		BLADES DIMENSIONS (GxHxL) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
					(C MIN) mm	(C MAX) mm				
11G08LL4A0001	5000	600	IV	1600	500	2340	140x450x1200	165	172	1260
11G08LL4A0002	5000	600	IV	1600	500	2340	140x450x1400	165	190	1310
11G08LL4A0003	5000	600	IV	1600	500	2340	140x450x1600	165	230	1360
11G08LL4A0004	5000	600	IV	1700	600	2640	140x450x1200	165	150	1310
11G08LL4A0005	5000	600	IV	1700	600	2640	140x450x1400	165	185	1360
11G08LL4A0006	5000	600	IV	1700	600	2640	140x450x1600	165	208	1410
11G08NC4A0001	6000	600	IV	1600	500	2340	140x450x1200	170	165	1320
11G08NC4A0002	6000	600	IV	1600	500	2340	140x450x1400	170	190	1370
11G08NC4A0003	6000	600	IV	1600	500	2340	140x450x1600	170	226	1420
11G08NC4A0004	6000	600	IV	1700	600	2640	140x450x1200	170	143	1370
11G08NC4A0005	6000	600	IV	1700	600	2640	140x450x1400	170	178	1420
11G08NC4A0006	6000	600	IV	1700	600	2640	140x450x1600	170	209	1470
11G08Q44A0001	7000	600	IV	1800	480	2520	140x450x1200	198	178	1455
11G08Q44A0002	7000	600	IV	1800	480	2520	140x450x1400	198	193	1505
11G08Q44A0003	7000	600	IV	1800	480	2520	140x450x1600	198	218	1555
11G08Q44A0004	7000	600	IV	2000	680	3120	140x450x1200	198	148	1645
11G08Q44A0005	7000	600	IV	2000	680	3120	140x450x1400	198	180	1695
11G08Q44A0006	7000	600	IV	2000	680	3120	140x450x1600	198	210	1745
11G08QZ4A0001	8000	600	IV	1800	480	2520	150x450x1200	205	166	1505
11G08QZ4A0002	8000	600	IV	1800	480	2520	150x450x1400	205	193	1555
11G08QZ4A0003	8000	600	IV	1800	480	2520	150x450x1600	205	220	1605
11G08QZ4A0004	8000	600	IV	2000	680	3120	150x450x1200	205	145	1725
11G08QZ4A0005	8000	600	IV	2000	680	3120	150x450x1400	205	180	1775
11G08QZ4A0006	8000	600	IV	2000	680	3120	150x450x1600	205	206	1825

Hydraulic functions required: 1 | Maximum working pressure: 175 bar

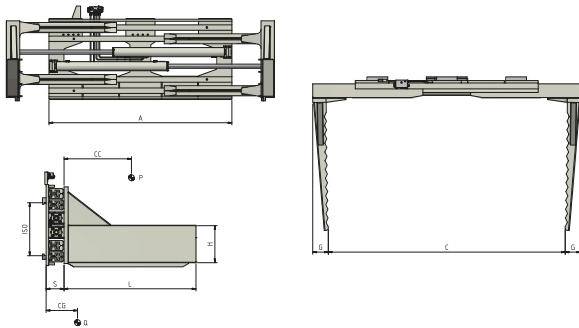

OPTIONS

- Pipes and Fitting Kit. • Quick Release Hoses couplings Kit. • Pressure Gauge. • Bronze Wear Pads. • Quick Release Hooks. • Solenoid Valve two Functions with Electric Kit (specify voltage). • Pressure Relief Valve, Non-Return Valve, Regenerative Valve. • 3 Position Pressure Relief Valve. • Manual Pressure-Relief Panel with Pressure Gauge and Indicator Lamp. • Electronic Pressure-Relief Panel with Keyboard and Indicator Lamp. • Automatic Pressure-Relief System. • Sideshifting Valve. • Semi-Integral Sideshift. • Automatic Greasing System for Semi-Integral Sideshift. • Preparation of Clamp for quick Change Arms (up to/over 3500 Kg).

- Preparation of quick Change Arms (up to/over 3500 Kg capacity). • Cylinder Protection Plate. • Wear-free Plates under the Frame. • Wear-free Plates under the Blades.

ADDITIONAL EQUIPMENT ON REQUEST

- Clamps with special width and/or stroke. • Load Backrest of various widths and heights. • Blades of any length and height.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
116.130	ISO 4	20	40	30

