




Hook-on Sideshifts

Hook-on Side Shifts designed to move the load in a transverse direction than the forklift way, in order to ease the grab and drop of load without making annoying operations with the forklift.

122 INTEGRAL SIDESHIFTS

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 - FEM	CARRIAGE WIDTH (A) mm	VISIBILITY (V) mm	STROKE (T) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
03WFA2C3002	2500	500	II	920	209	100	65	34	72
03WFA2C3007	2500	500	II	1020	209	100	65	34	80
03WLL3C3002	5000	500	III	1150	265	100	75	39	160
03WLL3C3025	5000	500	III	1350	265	100	75	39	172
03TR04C3003	6000	600	IV	1800	202	100	100	62	405
03TR04C3012	6000	600	IV	2000	202	100	100	62	450
03TR04C5008	8000	600	IV	1800	202	150	100	62	495
03TR04C5004	8000	600	IV	2000	202	150	100	62	570

Hydraulic functions required: 1 | Maximum working pressure: 200 bar

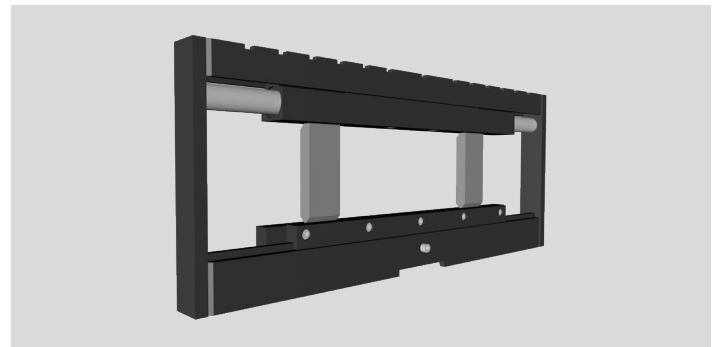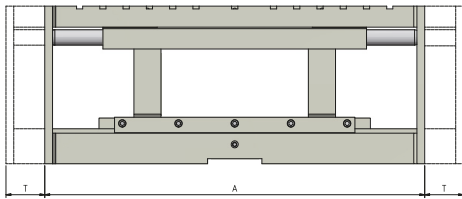

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Drilling for Load Backrest.
- Different frame widths.

ADDITIONAL EQUIPMENT ON REQUEST

- Load Backrest of various widths and heights.
- Hook-on Forks with any section and length.
- Brackets can be realized upon submission of construction drawings.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
122	ISO 2	5	15	10
122	ISO 3	10	20	15
122	ISO 4	12	25	18

