




Rotating Clamps

Rotating Clamp specifically suggested to customers who need to move and rotate two or four barrels together. The clamping force, which can be set through a hydraulic valve, allows a safe movement of the load. A pressure relief valve, a non-return valve and a regenerative valve are supplied as standard on each model. Min. and Max. openings can be adapted to different needs, as the arms dimension and length. Side shifting valve and semi-integral sideshift available on request.

301.474.190 360° ROTATING DRUM CLAMP FOR TWO OR FOUR DRUMS

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 FEM	FRAME WIDTH (A) mm	OPENING RANGE (C MIN) mm (C MAX) mm		BLADES SIZES (GxHxL) mm	DISTANCE (H) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
11M24AQ2A0001	1200	670	II	950	340	1340	235x450x675	660	234	214	442
11M24D62A0001	1900	675	II	1050	330	1680	235x450x675	660	267	212	696

Hydraulic functions required: 2 | Maximum working pressure: 175 bar

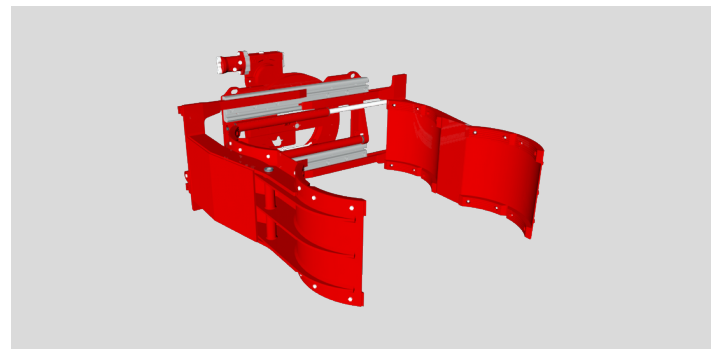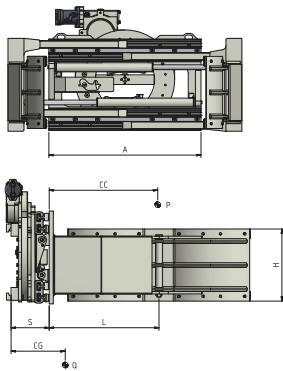

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve, Non-Return Valve, Regenerative Valve.
- 3 Position Pressure Relief Valve.
- Manual Pressure-Relief Panel with Pressure Gauge and Indicator Lamp.
- Electronic Pressure-Relief Panel with Keyboard and Indicator Lamp.
- Automatic Pressure-Relief System.
- Rotation Mechanical Block at 180°.
- Sideshifting Valve.
- Semi-Integral Sideshift.
- Automatic Greasing System for Semi-Integral Sideshift.
- Preparation of Clamp for quick Change Arms (up to/over 3500 Kg).
- Preparation of quick Change Arms (up to/over 3500 Kg capacity).
- Cylinder Protection Plate.
- Wear-free Plates under the Frame.

ADDITIONAL EQUIPMENT ON REQUEST

- Rotating Clamps with special width and/or stroke.
- Load Backrest of various widths and heights.
- Flat Slip-On Arms.
- Slip-On Arms for Drums and with 90° or 180° Hydraulic Rotation.
- V-shaped plates of various diameters for barrel grabbing.

OIL FLOW RATE

In **bold** the values referred to the rotation capacities.

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
301.474.190	ISO 2	10/10	40/60	20/25

