



# Roll Clamps

**Roll Clamp** with a short adjustable arm, which allows a wider opening, and a long complete one. 90° frontal tipping allows the gripping of the rolls, placed perpendicular to the axis of the forklift. A wide choice of openings, capacities and contact pads allow to find the perfect attachment for every needs.

## 343SM ROLL CLAMP WITH 90° FORWARD TIPPING AND ADJUSTABLE ARMS

REFERENCE	ATTACHMENT CAPACITY Kg	ISO 2328 FEM	ROLLS DIAMETER		CONTACT PADS (DxL) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	CENTER OF GRAVITY (CG1) mm	WEIGHT (Q) Kg
			(J) mm	(K) mm					
21K012G2C0001	900	II	250	1100	700X200	235	220	325	560
21K012G2C0002	900	II	250	1400	700X200	235	225	345	610
21K012Q2C0001	1300	II	250	1150	750X250	235	240	365	640
21K012Q2C0002	1300	II	250	1300	750X250	235	245	375	665
21K01342C0001	2000	II	250	1300	850X250	250	255	405	780
21K01343C0001	2000	III	250	1300	850X250	265	255	405	850
21K01343C0002	2000	III	250	1600	850X250	265	260	425	900
21K013G3C0001	2600	III	300	1300	900X250	300	265	435	1040
21K013G3C0002	2600	III	480	1600	900X250	300	275	465	1095
21K013Q3C0001	3000	III	250	1300	1015X300	310	280	460	1120
21K013W4C0001	3600	IV	480	1800	1050X300	320	285	510	1545

Hydraulic functions required: 2 | Maximum working pressure: 175 bar

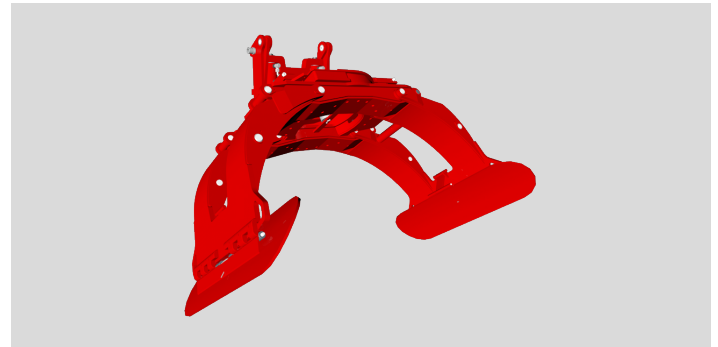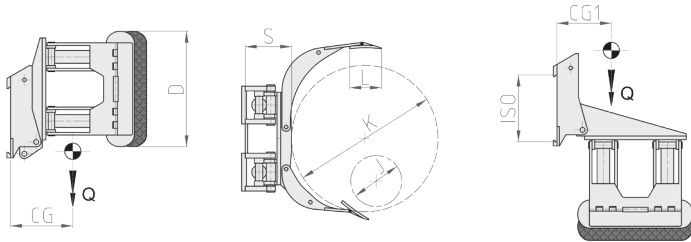

### OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve, Non-Return Valve, Regenerative Valve.
- 3 Position Pressure Relief Valve.
- Manual Pressure-Relief Panel with Pressure Gauge and Indicator Lamp.
- Electronic Pressure-Relief Panel with Keyboard and Indicator Lamp.
- Automatic Pressure-Relief System.
- Semi-Integral Sideshift.
- Automatic Greasing System for Semi-Integral Sideshift.

- Mechanical block of Rotation at 180°.
- Milled Contact Plates/Coated Plates with a corundum layer (on request).
- Contact Plates with standard Rubber Coating.
- Contact Plates with smooth Rubber Coating.
- Contact Plates with honeycomb Rubber Coating

### ADDITIONAL EQUIPMENT ON REQUEST

- Roll and Tyres Clamps with special width and/or stroke.
- Roll and Tyres Clamps with parallel arms (ideal for containers loading/unloading operations, due to the clamp small size). Available both in the rotating and in the fixed versions.

### OIL FLOW RATE

In **bold** the values referred to the functions capacities, which are different from the clamping.

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
343 SM	ISO 2	20/15	40/40	25/20
343 SM	ISO 3	22/15	40/40	30/20
343 SM	ISO 4	30/15	50/60	35/25

