



# Roll Clamps

**Roll Clamp** can be produced with a 90°, 180° or 360° rotation. It's recommended to handle rolls which have reduced heights, like rolls of tape, sticky labels and packaging cardboards for food industry.

## 364 ROLL CLAMP WITH REDUCED HEIGHTS

REFERENCE	ATTACHMENT CAPACITY Kg	CENTER OF GRAVITY (CG) mm	ISO 2328 FEM	ROTATION	CARRIAGE WIDTH (A) mm	ROLLS DIAMETER (J) mm (K) mm	CONTACT PADS (HxL) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
73AF022	400	625	II	90°	800	300 1250	160X200	350	236	295
73AF023	400	625	II	180°	800	300 1250	180X300	350	236	300
73AF029	500	600	II	360°	620	300 1200	180X300	310	260	330

Hydraulic functions required: 2 | Maximum working pressure: 175 bar

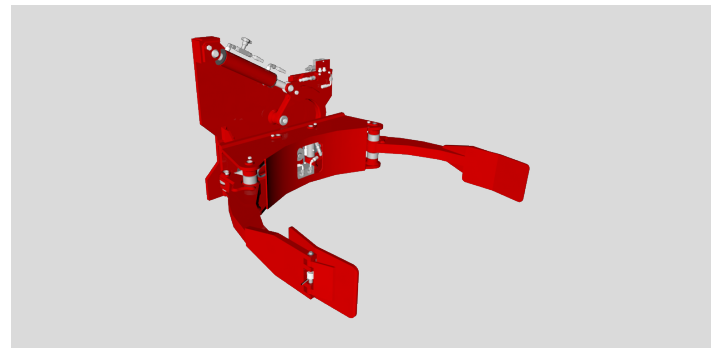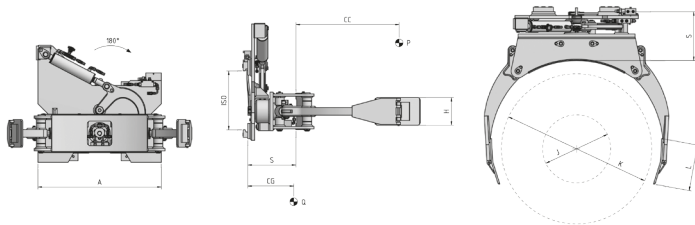

### OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve, Non-Return Valve, Regenerative Valve.
- 3 Position Pressure Relief Valve.
- Manual Pressure-Relief Panel with Pressure Gauge and Indicator Lamp.
- Electronic Pressure-Relief Panel with Keyboard and Indicator Lamp.
- Automatic Pressure-Relief System.
- Semi-Integral Sideshift.
- Automatic Greasing System for Semi-Integral Sideshift.
- Mechanical block of Rotation at 180°.
- Milled Contact Plates/Coated Plates with a corundum layer (on request).
- Contact Plates with standard Rubber Coating.
- Contact Plates with smooth Rubber Coating.
- Contact Plates with honeycomb Rubber Coating

### ADDITIONAL EQUIPMENT ON REQUEST

- Roll and Tyres Clamps with special width and/or stroke.
- Roll and Tyres Clamps with parallel arms (ideal for containers loading/unloading operations, due to the clamp small size). Available both in the rotating and in the fixed versions.

### OIL FLOW RATE

In **bold** the values referred to the functions capacities, which are different from the clamping.

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
364	ISO 2	20/10	<b>40/20</b>	<b>25/15</b>

