

Clamps



Clamp with both pivoting rubber covered arms, suggested to customers who need to move appliances and cardboards settled on double depth, in multiple rows and layers (they can handle up to 12 domestic appliances or cardboards in one grab). The clamping force, which can be set through hydraulic valve, allows a safe movement of the load. A pressure relief valve, a non-return valve and a regenerative valve are supplied as standard on each model. Min. and Max. openings can be adapted to different needs, as arms dimension and length. Side shifting valve and semi-integral sideshift available on request.

474.12.180 BOX AND APPLIANCES CLAMP WITH TWO PIVOTING ARMS

REFERENCE	ATTACHMENT CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 FEM	FRAME WIDTH (A) mm	OPENING RANGE (C MIN) mm (C MAX) mm		BLADES DIMENSIONS (GxHxL) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
11L15AQ2A0020	1200	500	II	950	510	1750	42X1000X1000	146	340	425
11L15AQ2A0021	1200	650	II	950	510	1750	42X1000X1300	146	385	440
11L15AQ2A0022*	1200	675	II	950	510	1750	46X1200X1350	146	440	505
11L15AQ2A0023	1200	500	II	1050	510	1850	42X1000X1000	146	336	440
11L15AQ2A0016	1200	650	II	1050	510	1850	42X1000X1300	146	381	455
11L15AQ2A0024*	1200	675	II	1050	510	1850	46X1200X1350	146	438	530
11L15AQ2A0025	1200	500	II	1150	460	1860	42X1000X1000	146	333	450
11L15AQ2A0026	1200	650	II	1150	460	1860	42X1000X1300	146	378	465
11L15AQ2A0017*	1200	675	II	1150	460	1860	46X1200X1350	146	435	570

* Splitted contact pads and load backrest on blade models.

Hydraulic functions required: 1 | Maximum working pressure: 175 bar

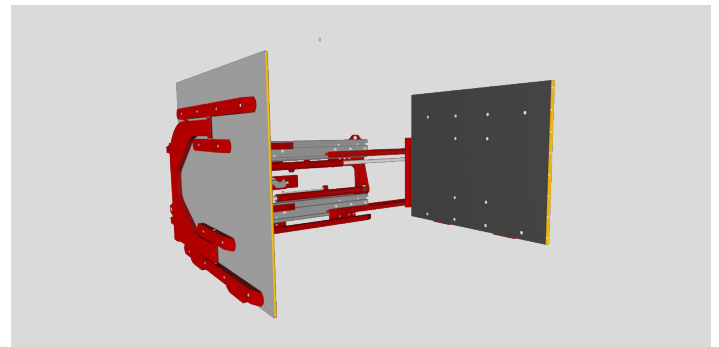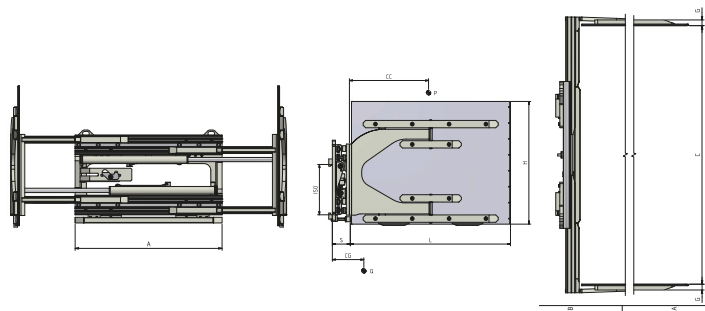

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve, Non-Return Valve, Regenerative Valve.
- 3 Position Pressure Relief Valve.
- Manual Pressure-Relief Panel with Pressure Gauge and Indicator Lamp.
- Electronic Pressure-Relief Panel with Keyboard and Indicator Lamp.
- Automatic Pressure-Relief System.
- Sideshifting Valve.
- Semi-Integral Sideshift.
- Automatic Greasing System for Semi-Integral Sideshift.

- Preparation of Clamp for quick Change Arms (up to/over 3500 Kg).
- Preparation of quick Change Arms (up to/over 3500 Kg capacity).
- Cylinder Protection Plate.
- Wear-free Plates under the Frame.
- Wear-free Plates under the Blades.
- Load Backrest extensions and Upper Blades restraint structures for clamps.

ADDITIONAL EQUIPMENT ON REQUEST

- Clamps with special width and/or stroke.
- Load Backrest of various widths and heights.
- Blades of any length and height, with single or double wing and mechanical block of the oscillation.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
474.12.180	ISO 2	10	40	20

