



Clamps

Clamp with compensating arms, suggested to customers who need to handle concrete blocks and building materials. The clamping force, which can be set through hydraulic valve, allows a safe movement of the load. A pressure relief valve, a non-return valve and a regenerative valve are supplied as standard on each model. Min. and Max. openings can be adapted to different needs, as arms dimension and length. Side shifting valve and semi-integral sideshift available on request.

474.141 BLOCK CLAMP WITH COMPENSATING ARMS

REFERENCE	ATTACHMENT CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 FEM	FRAME WIDTH (A) mm	OPENING RANGE		BLADES DIMENSIONS (GxHxL) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
					(C MIN) mm	(C MAX) mm				
11L20BE2A0001	1400	500	II	1050	400	1750	120X150X1095	137	252	405
11L20BE2A0002	1400	500	II	1050	400	1750	120X150X1295	137	306	422
11L20CG2A0001	1700	500	II	1050	400	1750	120X150X1095	137	252	405
11L20CG2A0002	1700	500	II	1050	400	1750	120X150X1295	137	306	422
11L20D62A0001	1900	500	II	1150	370	1820	125X170X1100	137	268	500
11L20D62A0002	1900	500	II	1150	370	1820	125X170X1300	137	327	493
11L20EY2A0001	2400	500	II	1150	370	1820	125X170X1100	137	268	465
11L20EY2A0002	2400	500	II	1150	370	1820	125X170X1300	137	327	493
11L20G03A0001	2700	500	III	1100	390	1760	125X170X1100	157	260	547
11L20G03A0002	2700	500	III	1100	390	1760	125X170X1300	157	311	573

Hydraulic functions required: 1 | Maximum working pressure: 175 bar

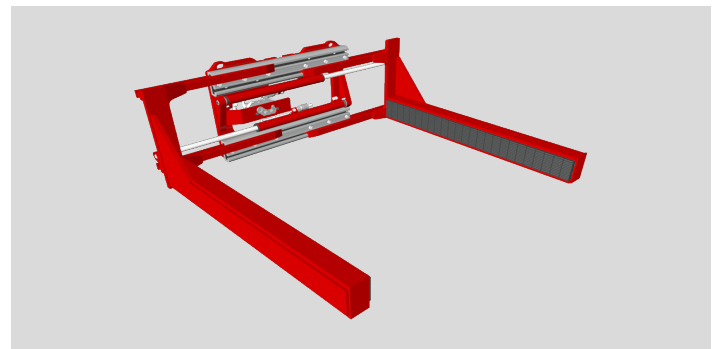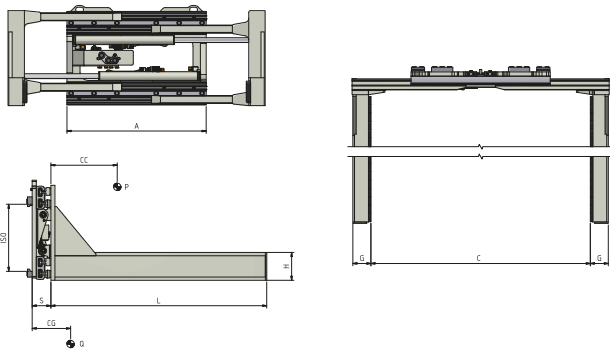

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve, Non-Return Valve, Regenerative Valve.
- 3 Position Pressure Relief Valve.
- Manual Pressure-Relief Panel with Pressure Gauge and Indicator Lamp.
- Electronic Pressure-Relief Panel with Keyboard and Indicator Lamp.
- Automatic Pressure-Relief System.
- Sideshifting Valve.
- Semi-Integral Sideshift.
- Automatic Greasing System for Semi-Integral Sideshift.

- Preparation of Clamp for quick Change Arms (up to/over 3500 Kg).
- Preparation of quick Change Arms (up to/over 3500 Kg capacity).
- Cylinder Protection Plate.
- Wear-free Plates under the Frame.
- Wear-free Plates under the Blades.

ADDITIONAL EQUIPMENT ON REQUEST

- Clamps with special width and/or stroke.
- Load Backrest of various widths and heights.
- Blades of any length.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
474.141	ISO 2	10	40	20
474.141	ISO 3	15	40	25

