


Hydraulic Attachments

Load Push, designed to move not-palletized goods. Removing the pallet leads to packaging cost reduction, allows to increase the volume of the transportable goods (specially in case of containers) and it reduces encumbrance of space in warehouses. Load-Push is particularly suitable to arrange not-palletized goods in double depth. Load-Push's range of capacities and strokes can be adapted to any customer need.

490 LOAD PUSH

REFERENCE	CAPACITY (P) Kg	ISO 2328 FEM	WIDTH (A) mm	HEIGHT (H) mm	STROKE (C) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
35A2J2A0001	1500	II	1200	1070	820	230	145	325
35A2J2A0002	1500	II	1200	1070	1070	230	145	335
35A2J2A0003	1500	II	1200	1170	1220	230	145	350
35A2U2A0001	2500	II	1200	1070	820	235	150	350
35A2U2A0002	2500	II	1200	1070	1070	235	150	360
35A2U2A0003	2500	II	1200	1170	1220	235	150	380

Hydraulic functions required: 1 | Maximum working pressure: 175 bar

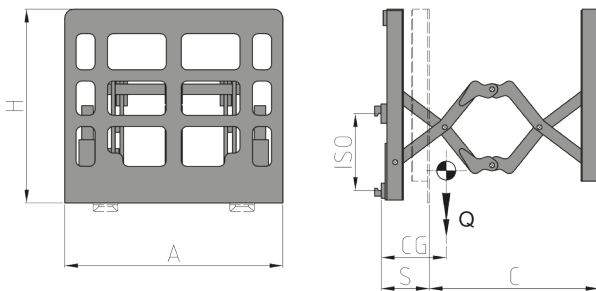

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Quick Release Hooks.
- Solenoid Valve two functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- 3 position Pressure Relief Valve.
- Semi-integral Sideshift.
- Automatic Greasing System for semi-integral Sideshift.

OTHER HYDRAULIC ATTACHMENTS

- Different specifications can be provided upon request.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
490	35A2J...	15	30	20
490	35A2U...	20	40	30

