
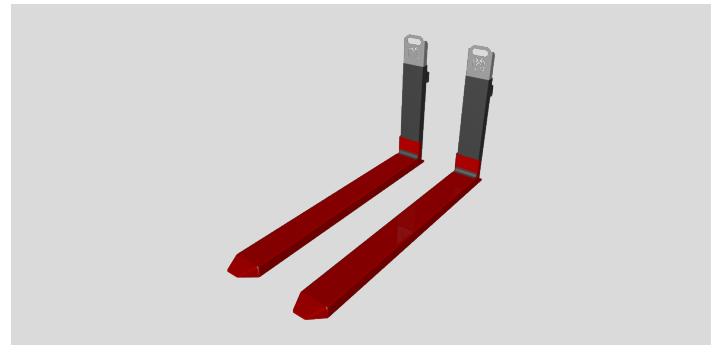


**Telescopic Forks**, hydraulic attachments designed to handle goods on pallet in double depth. Slight dimensions make them suitable for difficult operations in narrow spaces. Telescopic Forks work with only one cylinder, which allows to use smaller sections forks with a higher push-pull strength. The forks synchronism is managed by a flow divider, provided as standard on each model.

## 61 TELESCOPIC FORKS

| REFERENCE  | CAPACITY PER PAIR (P) Kg | LOAD CENTRE (CC) mm | ISO 2328 FEM | FORK SECTION |        | HEIGHT (H) mm | LENGTH  |         | THICKNESS (S) mm | CENTER OF GRAVITY (CG1) mm | CENTER OF GRAVITY (CG2) mm | WEIGHT PER PAIR (Q) Kg |
|------------|--------------------------|---------------------|--------------|--------------|--------|---------------|---------|---------|------------------|----------------------------|----------------------------|------------------------|
|            |                          |                     |              | (D) mm       | (G) mm |               | (L1) mm | (L2) mm |                  |                            |                            |                        |
| 53UFA2A139 | 2500                     | 600                 | II           | 133          | 58     | 725           | 1000    | 1650    | 53               | 349                        | 481                        | 151                    |
| 53UFA2A133 | 2500                     | 600                 | II           | 133          | 58     | 725           | 1150    | 1950    | 53               | 402                        | 560                        | 163                    |
| 53UFA2A126 | 2500                     | 600                 | II           | 133          | 58     | 725           | 1250    | 2150    | 53               | 447                        | 629                        | 174                    |
| 53UFA2A119 | 2500                     | 600                 | II           | 133          | 58     | 725           | 1350    | 2350    | 53               | 493                        | 699                        | 183                    |
| 53UKQ3A039 | 4500                     | 600                 | III          | 163          | 58     | 850           | 1150    | 1950    | 53               | 375                        | 511                        | 218                    |
| 53UKQ3A028 | 4500                     | 600                 | III          | 163          | 58     | 850           | 1250    | 2150    | 53               | 418                        | 575                        | 232                    |
| 53UKQ3A033 | 4500                     | 600                 | III          | 163          | 58     | 850           | 1350    | 2350    | 53               | 462                        | 641                        | 247                    |

Hydraulic functions required: 1 | Maximum working pressure 175 bar

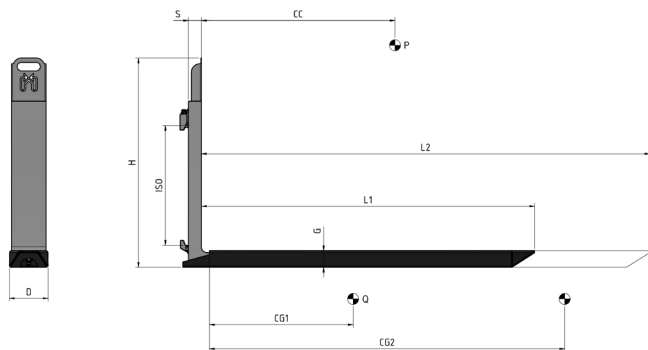

### OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Flow divider Valve.
- Stop-Pallet

### ADDITIONAL EQUIPMENT ON REQUEST

- Special Stop-Pallets with or without load backrest (Standard versions don't include the stop-pallets).
- Versions for FEM B mounting classes or with special drop.
- Thinner versions for the handling of Corrugated Cardboard pallets.

### OIL FLOW RATE

| TYPE | ISO 2328 - FEM | MIN CAPACITY (L/min) | MAX CAPACITY (L/min) | RECOMMENDED CAPACITY (L/min) |
|------|----------------|----------------------|----------------------|------------------------------|
| 61   | ALL            | 20                   | 25                   | 15                           |

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

