


# Hydraulic Attachments

**Load Stabilizer**, designed to stabilize unstable, voluminous or overlapped loads on pallets. It can be installed on the original fork carriage of the forklift, but also on other attachments like side-shifts, double or triple side-shifts, fork positioners and rotators. Special versions for double or triple fork positioners and for clamps can also be available on request. Minimum and maximum openings can be adapted to different needs, as the dimensions of the Plate of the Load Stabilizer.

## 951 LOAD STABILIZER

REFERENCE	ISO 2328 FEM	OPENING RANGE		FRAME			PLATE DIMENSIONS			THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
		(C MIN) mm	(C MAX) mm	(A) mm	(H) mm	(O) mm	(F) mm	(L) mm	(G) mm			
29F52A061	II	1000	1900	300	1300	2035	1000	1000	150	125	215	220
29F52A053	II	1000	1900	300	1300	2035	1000	1150	150	125	230	175
29F52A049	II	1000	2300	300	1700	2785	1000	1000	150	125	215	270
29F52A035	II	1000	2300	300	1700	2785	1000	1150	150	125	230	250
29F52A062	II	1100	2200	300	1500	2485	1000	1000	150	125	215	200
29F52A063	II	1100	2200	300	1500	2485	1000	1150	150	125	230	205
29F52A064	II	1200	2100	300	1300	2235	1000	1000	150	125	215	180
29F52A065	II	1200	2100	300	1300	2235	1000	1150	150	125	230	185
29F52A066	II	1200	2200	300	1400	2335	1000	1000	150	125	215	190
29F52A067	II	1200	2200	300	1400	2335	1000	1150	150	125	230	195
29F52A068	II	1200	2300	300	1500	2435	1000	1000	150	125	215	200
29F52A046	II	1200	2300	300	1500	2435	1000	1150	150	125	230	250
29F52A069	II	1300	2200	300	1300	2335	1000	1000	150	125	215	190
29F52A070	II	1300	2200	300	1300	2335	1000	1150	150	125	230	195

Hydraulic functions required: 1 | Maximum working pressure: 175 bar

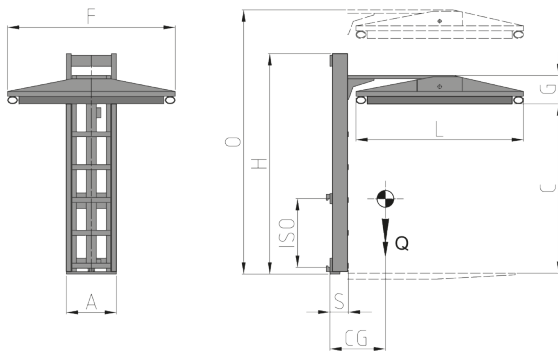

### OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Quick Release Hooks.
- Solenoid Valve two functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- 3 position Pressure Relief Valve.
- Semi-integral Sideshift.
- Automatic Greasing System for semi-integral Sideshift.

### ADDITIONAL EQUIPMENT ON REQUEST

- Special openings with double cylinder.

### OTHER HYDRAULIC ATTACHMENTS

- Different specifications can be provided upon request.

### OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
951	ALL	10	30	15

