


Hydraulic Attachments

Fork Mounted Hydraulic Bucket, designed to allow the load/unload operations of building industry materials (sand, gravel, concrete, terrain), but they are also recommended in agriculture. It's particularly suitable for customers who use it occasionally (for occasional or seasonal jobs).

971 FORK MOUNTED HYDRAULIC BUCKET

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	LOADING CAPACITY m ³	BUCKET DIMENSIONS (A) mm (H) mm		THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
41D086D002	930	950	0.52	1000	799	2075	820	280
41D0A6D002	1110	950	0.62	1200	799	2075	850	300
41D0D6D003	1310	950	0.73	1400	799	2075	880	400
41D0E6D001	1530	950	0.85	1200	952	2330	890	430
41D0J6D001	1760	950	0.98	1400	952	2330	930	460
41D0K6D001	2010	950	1.12	1600	952	2330	960	490

Hydraulic functions required: 1 | Maximum working pressure: 175 bar

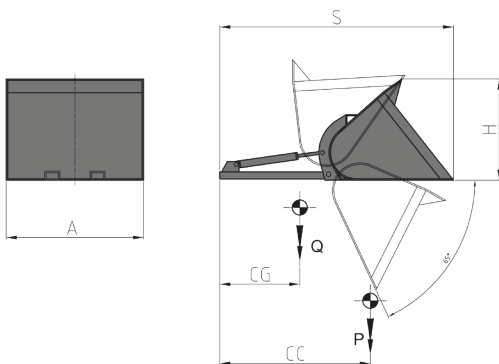

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Quick Release Hooks.
- Solenoid Valve two functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- 3 position Pressure Relief Valve.
- Semi-integral Sideshift.
- Automatic Greasing System for semi-integral Sideshift.

OTHER HYDRAULIC ATTACHMENTS

- Different specifications can be provided upon request.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
971	ALL	12	40	25

