

Fork Positioners

Fork Positioner realized with the exclusive “Moving Housing System” (A.T.I.B. Patented) that guarantees a constant and synchronized movement of the forks. It's completely made of Aluminum and that makes it perfect for food, chemical and pharmaceutical industry. We suggest not to mount forks over 1500 mm long. Adjustable plates allow to use forks with different sections size.



475 FORK POSITIONER



PATENTED

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 - FEM	CARRIAGE WIDTH (A) mm	OPENING RANGE		FORK WIDTH (D) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
					(C MIN) mm	(C MAX) mm				
18EFA2C0001	2500	500	II	920	350	880	130	61	30	28
18EFA2C0002	2500	500	II	970	350	930	130	61	30	30
18EFA2C0005	2500	500	II	1040	350	1000	130	61	31	33
18EFA2C0006	2500	500	II	1100	350	1060	130	61	32	35
18EFA2C0007	2500	500	II	1150	350	1110	130	61	32	38
18ELL3C0001	5000	500	III	1020	350	940	150	70	31	51
18ELL3C0002	5000	500	III	1070	350	990	150	70	32	52
18ELL3C0003	5000	500	III	1150	350	1070	150	70	33	54
18ELL3C0004	5000	500	III	1170	350	1090	150	70	35	55
18ELL3C0005	5000	500	III	1250	350	1170	150	70	35	58
18ELL3C0006	5000	500	III	1350	350	1270	150	70	37	60

Hydraulic functions required: 1 | Maximum working pressure: 110 bar

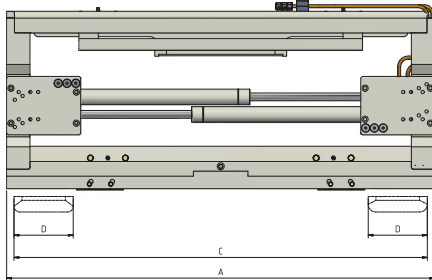

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Drilling for Load Backrest.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Check Valve for Barrel Grabbing.
- Automatic Greasing System for Semi-Integral Sideshift.

ADDITIONAL EQUIPMENT ON REQUEST

- Special width and/or stroke.
- Forks with any section and lenght.
- Load Backrest of various widths and heights.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
475	ALL	2	8	5

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

