

Multipallet Handlers


Multipallet Handler that allows to move one or two pallets side by side, thanks to the small dimension of the frame that eases operations in limited spaces. Four Bolt-on Forks, supplied as standard with reinforced heel and load backrest, make them easy and quick to replace.

917.2 DOUBLE FORK POSITIONER

FOR 1 - 2 PALLETS

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 - FEM	CARRIAGE WIDTH (A) mm	OPENING RANGE (C MIN) mm (C MAX) mm		FORKS (DxGxL) mm (H) mm		THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
15REA2A0004	2200	600	II	1200	560	1940	80x40x1150	1460	154	190	450
15RFB2A0005	2500	600	II	1200	560	1940	80x50x1150	1460	164	205	495
15RFB3A0005	2600	600	III	1200	560	1940	80x50x1150	1460	164	210	535
15RHF3A0005	3200	600	III	1200	560	1940	80x60x1150	1460	174	220	605
15RJV3A0003	4000	600	III	1400	560	1940	80x60x1150	1460	174	195	620

Hydraulic functions required: 1 | Maximum working pressure: 200 bar

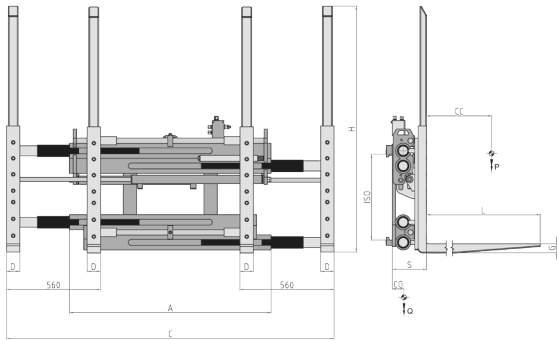

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- Automatic Greasing System for Semi-Integral Sideshift.

ADDITIONAL EQUIPMENT ON REQUEST

- Multi Pallet Handlers with special width and/or stroke.
- Forks with any section and lenght.
- Load Backrest of various widths and heights.
- Load Stabilizers.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
917.2	ALL	30	50	45

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

