

# Multipallet Handlers


**Multipallet Handler** that allows to move one or two pallets side by side, thanks to the small dimension of the frame that eases operations in limited spaces. Four Bolt-on Forks, supplied as standard with reinforced heel and load backrest, make them easy and quick to replace. Semi-Integral sideshift facilitates even more the handle of the pallets.

## 917.T2 DOUBLE FORK POSITIONER WITH SEMI-INTEGRAL SIDESHIFT

FOR 1 - 2 PALLETS

REFERENCE	CAPACITY	LOAD CENTRE	ISO 2328 - FEM	CARRIAGE WIDTH	OPENING RANGE		FORKS		STROKE	THICKNESS	CENTER OF GRAVITY	WEIGHT
	(P) Kg	(CC) mm		(A) mm	(C MIN) mm	(C MAX) mm	(DxGxL) mm	(H) mm	(T) mm	(S) mm	(CG) mm	(Q) Kg
15REA2A1004	2200	600	II	1200	560	1940	80x40x1150	1460	100	224	205	480
15RFB2A1005	2500	600	II	1200	560	1940	80x50x1150	1460	100	234	220	550
15RFB3A1005	2600	600	III	1200	560	1940	80x50x1150	1460	100	234	210	550
15RHF3A1005	3200	600	III	1200	560	1940	80x60x1150	1460	100	254	220	635
15RJV3A1003	4000	600	III	1400	560	1940	80x60x1150	1460	100	254	195	650

Hydraulic functions required: 2 | Maximum working pressure: 200 bar

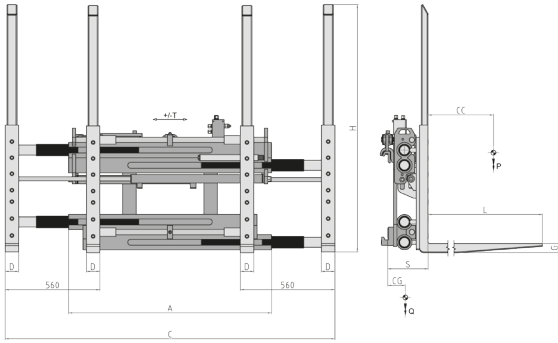

### OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- Automatic Greasing System for Semi-Integral Sideshift.

### ADDITIONAL EQUIPMENT ON REQUEST

- Multi Pallet Handlers with special width and/or stroke.
- Forks with any section and lenght.
- Load Backrest of various widths and heights.
- Load Stabilizers.

### OIL FLOW RATE

In **bold** the values referred to the sideshift capacities.

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
917.T2	ALL	30/10	<b>50/20</b>	<b>45/15</b>

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

