

Multipallet Handlers


Multipallet Handler that allows to move one or two pallets side by side, or four pallets in double depth thanks to the small dimension of the frame that eases operations in limited spaces. Four Bolt-on Forks, supplied as standard with reinforced heel and load backrest, make them easy and quick to replace. Semi-Integral sideshift facilitates even more the handle of the pallets.

917.T4 DOUBLE FORK POSITIONER WITH SEMI-INTEGRAL SIDESHIFT

FOR 1 - 2 - 4 PALLETS

REFERENCE	CAPACITY	LOAD CENTRE	ISO 2328 - FEM	CARRIAGE WIDTH	OPENING RANGE		FORKS		STROKE	THICKNESS	CENTER OF GRAVITY	WEIGHT
	(P) Kg	(CC) mm		(A) mm	(C MIN) mm	(C MAX) mm	(DxGxL) mm	(H) mm	(T) mm	(S) mm	(CG) mm	(Q) Kg
15RFC3A1001	2500	1200	III	1400	560	1940	80x60x2400	1460	100	225	480	1050
15RJ64A1001	3600	1200	IV	1400	560	1940	80x70x2400	1460	150	235	435	1320
15RKY4A1001	4600	1200	IV	1400	560	1940	80x70x2400	1460	150	235	445	1380

Hydraulic functions required: 2 | Maximum working pressure: 200 bar

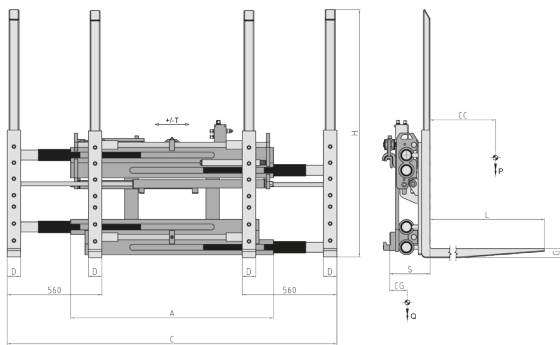

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- Automatic Greasing System for Semi-Integral Sideshift.

ADDITIONAL EQUIPMENT ON REQUEST

- Multi Pallet Handlers with special width and/or stroke.
- Forks with any section and lenght.
- Load Backrest of various widths and heights.
- Load Stabilizers.

OIL FLOW RATE

In **bold** the values referred to the sideshift capacities.

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
917.T4	ISO 3	30/10	50/20	45/15
917.T4	ISO 4	30/15	50/25	45/20

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

