



Multipallet Handlers

Multipallet Handler that allows to move one or two pallets side by side, thanks to the small dimension of the frame that eases operations in limited spaces. Six Bolt-on Forks, supplied as standard with reinforced heel and load backrest, make them easy and quick to replace. Semi-Integral sideshift facilitates even more the handle of the pallets.

918.T TRIPLE FORK POSITIONER WITH SEMI-INTEGRAL SIDESHIFT

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 - FEM	CARRIAGE WIDTH (A) mm	OPENING RANGE		FORKS		STROKE (T) mm	THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
					(C MIN) mm	(C MAX) mm	(DxGxL) mm	(H) mm				
15SH33A1001	3000	600	III	1630	560	2285	60x50x1150	1460	100	245	205	820
15SH33A1002	3000	600	III	1795	560	2450	60x50x1150	1460	100	250	200	840
15SJ53A1001	3600	600	III	1630	560	2285	60x60x1150	1460	100	248	240	860
15SJ53A1002	3600	600	III	1795	560	2450	60x60x1150	1460	100	248	237	880
15SJ53A1003	3600	600	III	2285	560	2940	60x60x1150	1460	100	248	225	980

Hydraulic functions required: 2 | Maximum working pressure: 200 bar

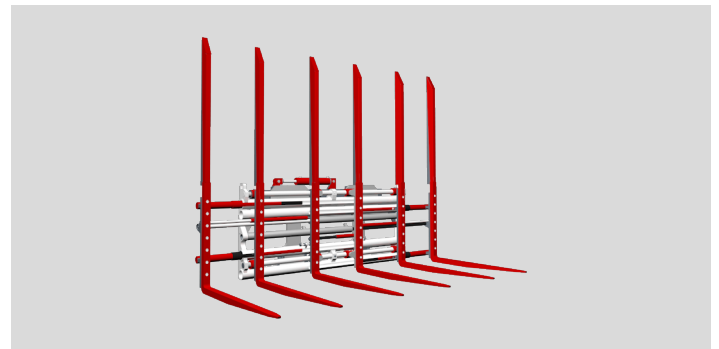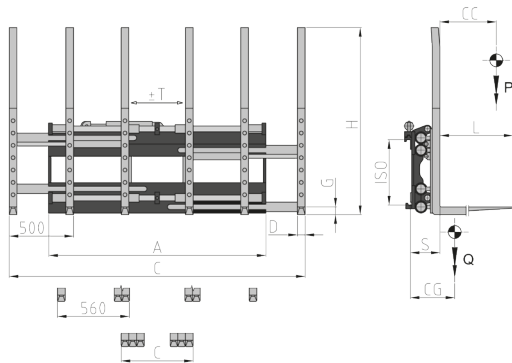

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- Automatic Greasing System for Semi-Integral Sideshift.

ADDITIONAL EQUIPMENT ON REQUEST

- Multi Pallet Handlers with special width and/or stroke.
- Forks with any section and lenght.
- Load Backrest of various widths and heights.
- Load Stabilizers.

OIL FLOW RATE

In **bold** the values referred to the sideshift capacities.

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
918.T	ALL	30/15	50/25	45/20

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

