



Multipallet Handlers

Multipallet Handler that allows to move one or two pallets side by side, thanks to the small dimension of the frame that eases operations in limited spaces. Six Bolt-on Forks, supplied as standard with reinforced heel and load backrest, make them easy and quick to replace.

918 TRIPLE FORK POSITIONER

REFERENCE	CAPACITY (P) Kg	LOAD CENTRE (CC) mm	ISO 2328 - FEM	CARRIAGE WIDTH (A) mm	OPENING RANGE (C MIN) mm (C MAX) mm		FORKS (DxGxL) mm (H) mm		THICKNESS (S) mm	CENTER OF GRAVITY (CG) mm	WEIGHT (Q) Kg
15SH33A0001	3000	600	III	1630	560	2285	60x50x1150	1460	209	198	715
15SH33A0002	3000	600	III	1795	560	2450	60x50x1150	1460	209	218	760
15SJ53A0001	3600	600	III	1630	560	2285	60x60x1150	1460	219	225	755
15SJ53A0002	3600	600	III	1795	560	2450	60x60x1150	1460	219	217	815
15SJ53A0003	3600	600	III	2285	560	2940	60x60x1150	1460	219	210	900

Hydraulic functions required: 1 | Maximum working pressure: 200 bar

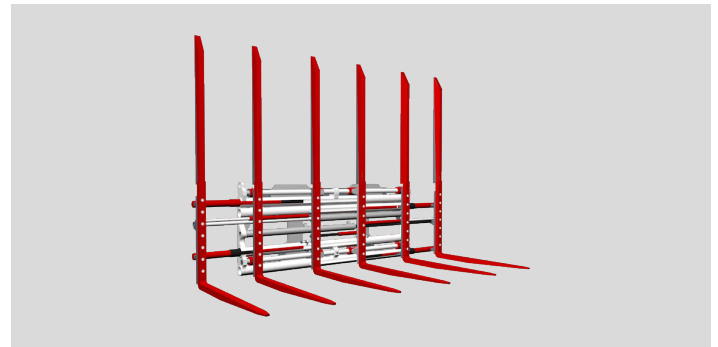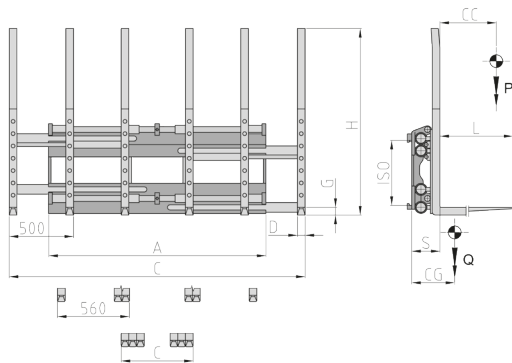

OPTIONS

- Pipes and Fitting Kit.
- Quick Release Hoses couplings Kit.
- Pressure Gauge.
- Bronze Wear Pads.
- Quick Release Hooks.
- Solenoid Valve two Functions with Electric Kit (specify voltage).
- Pressure Relief Valve.
- Automatic Greasing System for Semi-Integral Sideshift.

ADDITIONAL EQUIPMENT ON REQUEST

- Multi Pallet Handlers with special width and/or stroke.
- Forks with any section and length.
- Load Backrest of various widths and heights.
- Load Stabilizers.

OIL FLOW RATE

TYPE	ISO 2328 - FEM	MIN CAPACITY (L/min)	MAX CAPACITY (L/min)	RECOMMENDED CAPACITY (L/min)
918	ALL	30	50	45

- A - Pin-Type Forks
- B - Bolted Forks
- C - Welded Forks
- D - Telescopic Forks

