


## 109 Hook on Sideshift ISO3

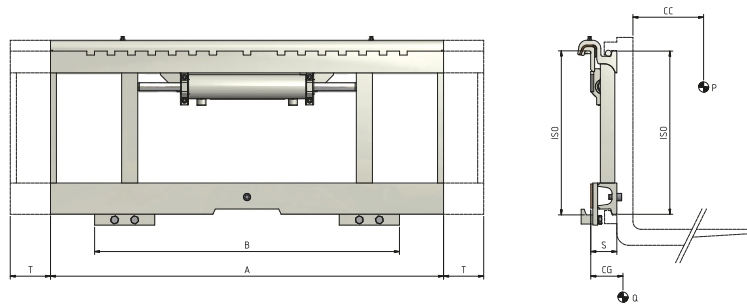

HYDRAULIC FUNCTIONS: 1 | MAX WORKING PRESSURE: 200 Bar

### Features:

- Sturdy and long lasting design.
- Transverse load displacement.
- Fast and accurate lifting and positioning of loads.
- Lower risk of damage to goods and pallets.
- Easier manoeuvres, even in confined spaces.

### Special Equipment:


- Special widths and/or strokes.
- Custom made Forks.
- Custom made Load Backrest.

| ART. N°     | P (Kg) | CC (mm) | ISO 2328 | A (mm) | B (mm) | T (mm) | S (mm) | CG (mm) | Q (Kg) |
|-------------|--------|---------|----------|--------|--------|--------|--------|---------|--------|
| 03HLL3C3008 | 5000   | 500     | III      | 1150   | 1000   | 100    | 75     | 40      | 103    |
| 03HLL3C3010 | 5000   | 500     | III      | 1255   | 1100   | 100    | 75     | 41      | 110    |
| 03HLL3C3014 | 5000   | 500     | III      | 1350   | 1200   | 100    | 75     | 42      | 118    |
| 03HLL3C3018 | 5000   | 500     | III      | 1560   | 1540   | 100    | 75     | 42      | 130    |
| 03HLL3C3020 | 5000   | 500     | III      | 1660   | 1640   | 100    | 75     | 43      | 137    |

### OIL FLOW RATE

| ISO | (L/min) |
|-----|---------|
| III | ↔ 15    |

↔ Shifting



**P** ATTACHMENT CAPACITY  
**CC** LOAD CENTRE OF GRAVITY  
**A** CARRIAGE WIDTH  
**B** MINIMUM FORK CARRIAGE  
**T** STROKE  
**S** THICKNESS  
**CG** CENTRE OF GRAVITY  
**Q** WEIGHT

Please refer to our catalogue for further Special Equipment