


918.T Triple Fork Positioner with Semi-Integral Sideshift (1-2-3 Pallets)

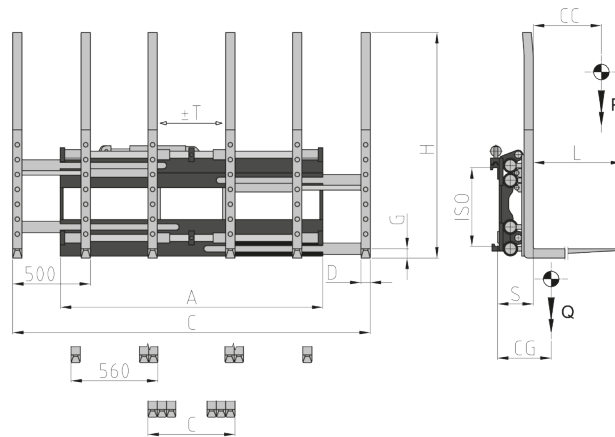

HYDRAULIC FUNCTIONS: 2 | MAX WORKING PRESSURE: 200 Bar

Features:

- One, two or three pallets side by side.
- Smaller frame ease dimension.
- 6 bolt-on forks supplied with reinforced heel and load backrest, for easier replacement operations.
- Easier and safer manoeuvres, even in narrow spaces.

Special Equipment:

- Special widths and/or strokes.
- Custom made Forks.
- Custom made Load Backrest.
- Load Stabiliser with custom made dimensions/openings.

ART. N°	P (Kg)	CC (mm)	ISO 2328	A (mm)	C		DxGxL (mm)	H (mm)	T (mm)	S (mm)	CG (mm)	Q (Kg)
					Min (mm)	Max (mm)						
15SH33A1001	3000	600	III	1630	560	2285	60x50x1150	1460	100	245	205	820
15SH33A1002	3000	600	III	1795	560	2450	60x50x1150	1460	100	250	200	840
15SJ53A1001	3600	600	III	1630	560	2285	60x60x1150	1460	100	248	240	860
15SJ53A1002	3600	600	III	1795	560	2450	60x60x1150	1460	100	248	237	880
15SJ53A1003	3600	600	III	2285	560	2940	60x60x1150	1460	100	248	225	980

OIL FLOW RATE

ISO	(L/min)	
	↔	↕
III	20	45

↕ Shifting
 ↔ Opening
 ↕ Closing



P ATTACHMENT CAPACITY
CC LOAD CENTRE OF GRAVITY
A CARRIAGE WIDTH
C OPENING RANGE
DxGxL FORKS
H FORKS HEIGHT
T STROKE
S THICKNESS
CG CENTRE OF GRAVITY
Q WEIGHT

Please refer to our catalogue for further Special Equipment