


116.130 Bale Clamp with wavy edged arms

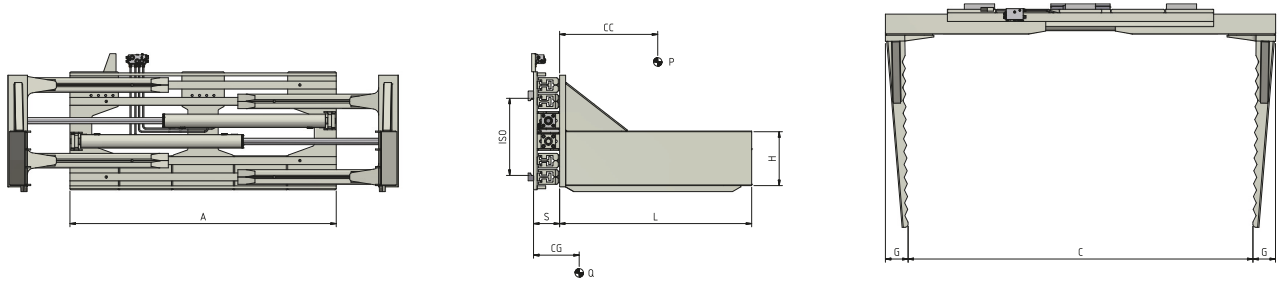

HYDRAULIC FUNCTIONS: 1 | MAX WORKING PRESSURE: 175 Bar

Features:

- Handling of voluminous loads of any type.
- Adjustable clamping force with hydraulic valve.
- Pressure Relief Valve.
- Non-return Valve.
- Regenerative Valve.

Special Equipment:


- Custom made widths/openings.
- Custom made Blades.
- Load Backrest.
- Sideshifting Valve or Semi-Integral Sideshift.

ART. N°	P (Kg)	CC (mm)	ISO 2328	A (mm)	C		GxHxL (mm)	S (mm)	CG (mm)	Q (Kg)
					Min (mm)	Max (mm)				
11G08LL4A0001	5000	600	IV	1600	500	2340	140x450x1200	165	172	1260
11G08LL4A0002	5000	600	IV	1600	500	2340	140x450x1400	165	190	1310
11G08LL4A0003	5000	600	IV	1600	500	2340	140x450x1600	165	230	1360
11G08LL4A0004	5000	600	IV	1700	600	2640	140x450x1200	165	150	1310
11G08LL4A0005	5000	600	IV	1700	600	2640	140x450x1400	165	185	1360
11G08LL4A0006	5000	600	IV	1700	600	2640	140x450x1600	165	208	1410
11G08NC4A0001	6000	600	IV	1600	500	2340	140x450x1200	170	165	1320
11G08NC4A0002	6000	600	IV	1600	500	2340	140x450x1400	170	190	1370
11G08NC4A0003	6000	600	IV	1600	500	2340	140x450x1600	170	226	1420
11G08NC4A0004	6000	600	IV	1700	600	2640	140x450x1200	170	143	1370
11G08NC4A0005	6000	600	IV	1700	600	2640	140x450x1400	170	178	1420
11G08NC4A0006	6000	600	IV	1700	600	2640	140x450x1600	170	209	1470
11G08Q44A0001	7000	600	IV	1800	480	2520	140x450x1200	198	178	1455
11G08Q44A0002	7000	600	IV	1800	480	2520	140x450x1400	198	193	1505
11G08Q44A0003	7000	600	IV	1800	480	2520	140x450x1600	198	218	1555
11G08Q44A0004	7000	600	IV	2000	680	3120	140x450x1200	198	148	1645
11G08Q44A0005	7000	600	IV	2000	680	3120	140x450x1400	198	180	1695
11G08Q44A0006	7000	600	IV	2000	680	3120	140x450x1600	198	210	1745
11G08QZ4A0001	8000	600	IV	1800	480	2520	150x450x1200	205	166	1505
11G08QZ4A0002	8000	600	IV	1800	480	2520	150x450x1400	205	193	1555
11G08QZ4A0003	8000	600	IV	1800	480	2520	150x450x1600	205	220	1605
11G08QZ4A0004	8000	600	IV	2000	680	3120	150x450x1200	205	145	1725
11G08QZ4A0005	8000	600	IV	2000	680	3120	150x450x1400	205	180	1775
11G08QZ4A0006	8000	600	IV	2000	680	3120	150x450x1600	205	206	1825

OIL FLOW RATE

ISO	(L/min)
	IV

→||← Clamping



- P ATTACHMENT CAPACITY
- CC LOAD CENTRE OF GRAVITY
- A FRAME WIDTH
- C OPENING RANGE
- GxHxL BLADES
- S THICKNESS
- CG CENTRE OF GRAVITY
- Q WEIGHT

Please refer to our catalogue for further Special Equipment