


30I SLS 360° Rotator with Integral Sideshift

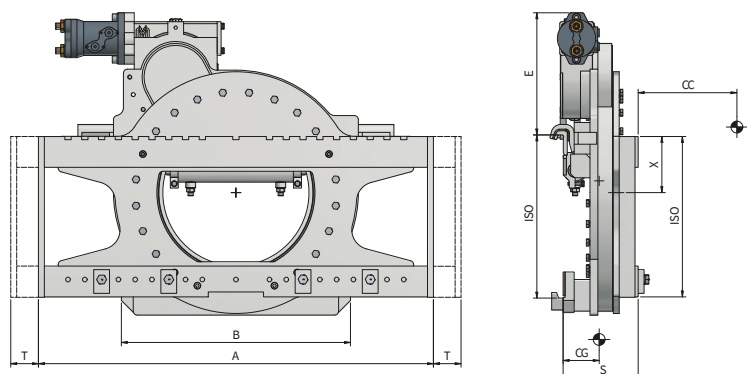

Hydraulic functions: 2 | Max working pressure: 175 Bar

Features:

- Continuous rotation of 360° in both directions.
- Recommended use of forks with reinforced lower hooks.

Special Equipment:


- Special widths and/or strokes.
- Forks.
- Load Backrest.
- Pin-Type Forks.
- Special versions for Agriculture, Fish Industry and Foundries.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Height	Minimum Fork Carriage	Rotation Centre	Stroke	Oil Volume	Torque	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	E (mm)	B (mm)	X (mm)	T (mm)	V (L/spin)	Nm P (100 Bar)	S (mm)	CG (mm)	Q (kg)
23EC42C2002	1600	500	2	1000	314	700	141	± 100	8.1	6700	190	92	227
23EE82C2002	2200	500	2	1100	314	700	141	± 100	8.1	6700	190	93	230
23EH23C2002	3000	500	3	1150	335,5	900	185	± 100	8.8	7400	217	107	347
23EHS3C2002	3400	500	3	1270	335,5	900	185	± 100	8.8	12300	217	108	357
23EK63C2024	4200	500	3	1400	335,5	900	185	± 100	8.8	12300	217	110	367
23EL83C2002	4800	500	3	1660	335,5	900	185	± 100	8.8	12300	217	113	377
23EKR4C2001	4500	600	4	1350	305,5	960	235	± 100	12	13000	264	141	628
23ELM4C0001	5000	600	4	1600	305,5	960	235	± 100	12	13000	264	143	652
23END4C2001	5500	600	4	1800	305,5	960	235	± 100	14	14100	264	140	720
23EQ54C2001	7000	600	4	2000	287	1300	262	± 150	18	16200	301	162	920
23ER04C2002	8000	600	4	2000	287	1300	262	± 150	22	24200	301	162	920
23ERQ5C2001	10000	600	5	2000	360	2000	224	± 150	26	29500	207	172	1860

Oil flow rate

ISO	(L/min)	
	↔	↻
2	10	25
3	15	25
4	18	30/35*
5	25	35

↔ Shifting
↻ Rotation



Please refer to our catalogue for further Special Equipment