


490 Load Push

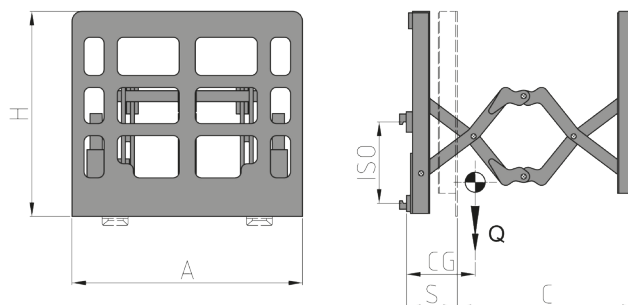

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

- Handling of non-palletized goods/positioning of non-palletized goods in double depth.
- The elimination of the pallet reduces the packing costs and the encumbrances in the warehouses, and increases the volume of the transportable goods.

Special Equipment:

- Custom made capacities/strokes.

Article	Attachment Capacity	ISO	Width	Height	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	2328	A (mm)	H (mm)	C (mm)	S (mm)	CG (mm)	Q (kg)
35A2J2A0001	1500	2	1200	1070	820	230	145	325
35A2J2A0002	1500	2	1200	1070	1070	230	145	335
35A2J2A0003	1500	2	1200	1170	1220	230	145	350
35A2U2A0001	2500	2	1200	1070	820	235	150	350
35A2U2A0002	2500	2	1200	1070	1070	235	150	360
35A2U2A0003	2500	2	1200	1170	1220	235	150	380

Oil flow rate	
ISO	(L/min)
2	20/30*

↑ Opening
↓ Closing

Please refer to our catalogue for further Special Equipment