


505 Sideshifting Push-Pull with Sheet Retention

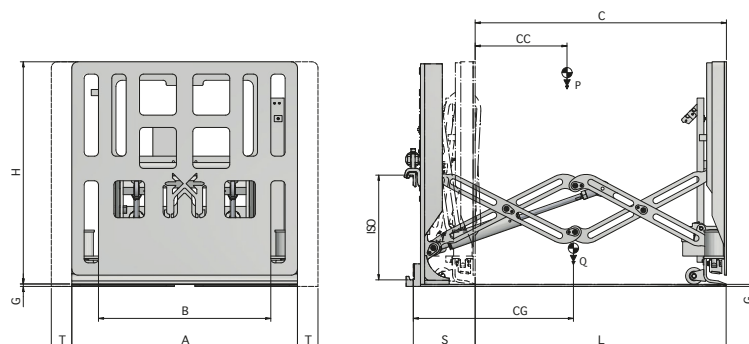

Hydraulic functions: 2 + Electrical functions: 1 | Max working pressure: 175 Bar

Features:

- Handling of non-palletized goods.
- Allows to recover sheets of paper, cardboard, or plastic.
- The elimination of the pallet reduces the packing costs and the encumbrances in the warehouses, and increases the volume of the transportable goods.

Special Equipment:

- Custom made capacities/strokes.
- Models with no Sideshift/Sheet Retention are available.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Stroke	Height	Load Platform			Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	C (mm)	H (mm)	A (mm)	L (mm)	G (mm)	S (mm)	CG (mm)	Q (kg)
33B2J2A2001	1000	550	2	1120	1000	1200	1070	20	270	235	620
33B2J2A2002	1000	650	2	1270	1100	1200	1220	20	270	245	685
33B2U2A2001	1500	550	2	1120	1000	1250	1070	25	275	240	720
33B2U3A2002	1500	650	3	1270	1100	1250	1220	25	275	250	790
33B343A2001	2000	550	3	1120	1000	1250	1070	30	300	270	830
33B343A2002	2000	650	3	1270	1100	1250	1220	30	300	280	920

Oil flow rate				
ISO	(L/min)			
	↔	↔	↔	
2	10	15	10	↔ Shifting
3	15	20	15	↔ Opening ↔ Closing ↔ Clamping

Please refer to our catalogue for further Special Equipment