


30I.474.IB1 360° Rotating Bale Clamp with thin blades

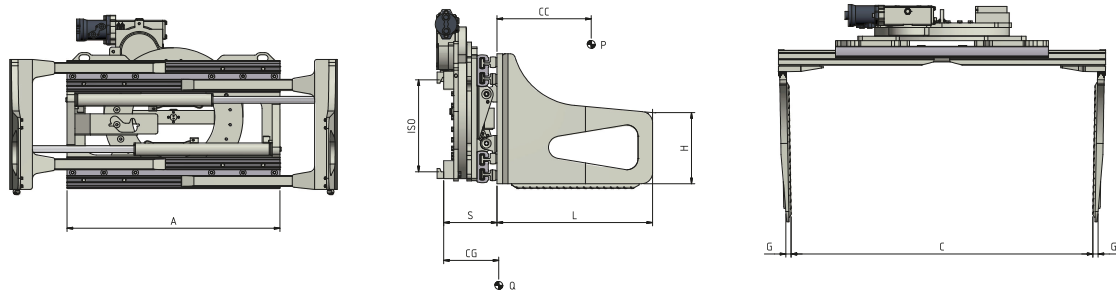

Hydraulic functions: 2 | Max working pressure: 175 Bar

Features:

• Thin welded full penetration arms. • Handling of Bales of paper, carton, plastic, junk, other materials. • Handling goods by clamping and rotation. • Adjustable clamping force with hydraulic valve. • Pressure Relief Valve. • Non-return Valve. • Regenerative Valve.


Special Equipment:

• Custom made widths/openings. • Custom made Blades. • Load Backrest. • Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
					C Min (mm)	C Max (mm)				
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11M07AQ2A0001	1200	500	2	850	420	1460	21x350x900	234	220	450
11M07AQ2A0002	1200	500	2	950	520	1760	21x350x900	234	218	453
11M07AQ2A0003	1200	500	2	1050	620	2060	21x350x900	234	217	468
11M07BE2A0003	1400	500	2	950	420	1570	21x400x1000	267	263	588
11M07BE2A0002	1400	500	2	1050	520	1870	21x400x1000	267	261	608
11M07BE2A0004	1400	500	2	1150	620	2170	21x400x1000	267	259	620
11M07BE2A0005	1400	500	2	1250	520	2070	21x400x1000	267	257	636
11M07CG2A0003	1700	500	2	950	420	1570	21x400x1000	267	263	588
11M07CG2A0001	1700	500	2	1050	520	1870	21x400x1000	267	261	604
11M07D62A0002	1900	500	2	1050	420	1670	23x400x1000	267	268	609
11M07D62A0004	1900	500	2	1150	520	1970	23x400x1000	267	266	625
11M07D62A0005	1900	500	2	1250	620	2270	23x400x1000	267	263	641
11M07D62A0006	1900	500	2	1350	720	2570	23x400x1000	267	261	657
11M07EY3A0002	2400	500	3	1050	420	1670	23x400x1000	267	249	680
11M07EY3A0003	2400	500	3	1150	520	1970	23x400x1000	267	244	694
11M07G03A0004	2700	500	3	1100	540	1910	26x400x1000	292	290	940
11M07G03A0005	2700	500	3	1100	530	1900	26x400x1200	292	348	984
11M07G03A0006	2700	500	3	1200	440	1810	26x400x1000	292	285	964
11M07G03A0007	2700	500	3	1200	430	1800	26x400x1200	292	370	1010
11M07G03A0008	2700	500	3	1300	540	2110	26x400x1000	292	280	990
11M07G03A0003	2700	500	3	1300	530	2100	26x400x1200	292	338	1035
11M07G03A0009	2700	500	3	1400	640	2410	26x400x1000	292	275	1015
11M07G03A0010	2700	500	3	1400	630	2400	26x400x1200	292	334	1060
11M07HY3A0001	3500	500	3	1200	470	1880	29x500x1200	302	378	1150
11M07HY3A0002	3500	500	3	1200	460	1870	29x500x1500	302	462	1270
11M07HY3A0003	3500	500	3	1300	570	2180	29x500x1200	302	382	1190
11M07HY3A0004	3500	500	3	1300	560	2170	29x500x1500	302	458	1290
11M07HY3A0005	3500	500	3	1400	670	2480	29x500x1200	302	379	1200
11M07HY3A0006	3500	500	3	1400	660	2470	29x500x1500	302	454	1310

Oil flow rate		
ISO	(L/min)	
	→ ←	↻
2	25	20
3	25	25

→|← Clamping
↻ Rotation



Please refer to our catalogue for further Special Equipment