


600 Load Extender

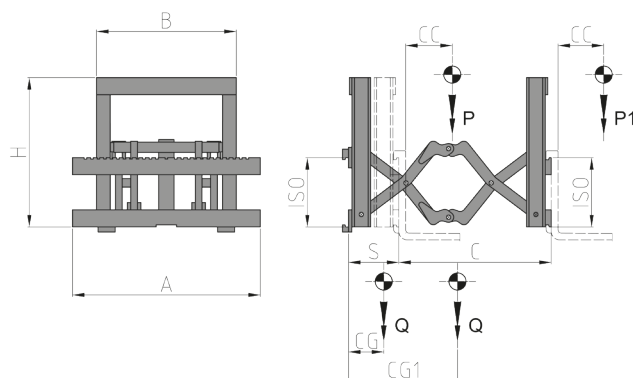

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

- Positioning of palletized goods in double depth.
- For double row storage or truck loading from one side only.
- Useful in narrow spaces that do not allow large manoeuvres.

Special Equipment:

- Custom made capacities/strokes.

Article	Closed Attachment Capacity	Open Attachment Capacity	Load Centre of Gravity	Back ISO	Front ISO	Stroke	Frame Dimensions	Carriage Width	Thickness	Closed Centre of Gravity	Open Centre of Gravity	Weight
N°	P (kg)	P1 (kg)	CC (mm)	2328	2328	C (mm)	BxH (mm)	A (mm)	S (mm)	CG (mm)	CG1 (mm)	Q (kg)
37ABS2C0002	1500	800	500	2	2	950	800x1000	980	320	165	645	580
37ABS2C0003	1500	800	500	2	2	1200	800x1000	980	320	165	770	580
37ABS2C0004	1500	800	500	2	2	950	800x1000	1100	320	170	650	600
37ABS2C0005	1500	800	500	2	2	1200	800x1000	1100	320	170	775	600
37AFA7C0001	2500	1300	500	3	2	950	800x1000	1100	330	170	650	615
37AFA7C0002	2500	1300	500	3	2	1200	800x1000	1100	330	170	780	615
37AFA7C0003	2500	1300	500	3	2	950	800x1000	1300	330	175	670	650
37AFA7C0004	2500	1300	500	3	2	1200	800x1000	1300	330	175	795	650
37AJU3C0006	4000	2000	500	3	3	950	800x1000	1300	350	185	675	640
37AJU3C0007	4000	2000	500	3	3	1200	800x1000	1300	350	185	800	910
37AJU3C0008	4000	2000	500	3	3	950	800x1000	1650	350	200	685	960
37AJU3C0009	4000	2000	500	3	3	1200	800x1000	1650	350	200	810	960

Oil flow rate	
ISO	(L/min)
	↕
2	20/30*
3	30

↕ Opening
↕ Closing

Please refer to our catalogue for further Special Equipment