


918.T Triple Fork Positioner with Semi-Integral Sideshift (1-2-3 Pallets)

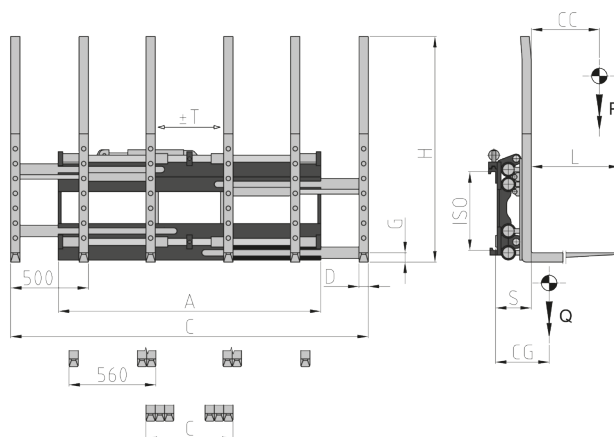

Hydraulic functions: 2 | Max working pressure: 200 Bar

Features:

- One, two or three pallets side by side.
- Smaller frame ease dimension.
- 6 bolt-on forks supplied with reinforced heel and load backrest, for easier replacement operations.
- Easier and safer manoeuvres, even in narrow spaces.


Special Equipment:

- Special widths and/or strokes.
- Custom made Forks.
- Custom made Load Backrest.
- Load Stabiliser with custom made dimensions/openings.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Opening Range		Forks	Forks Height	Stroke	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	DxGxL (mm)	H (mm)	T (mm)	S (mm)	CG (mm)	Q (kg)
15SH33A1001	3000	600	3a	1630	560	2285	60x50x1150	1460	± 100	245	205	820
15SH33A1002	3000	600	3a	1795	560	2450	60x50x1150	1460	± 100	250	200	840
15SJ53A1001	3600	600	3a	1630	560	2285	60x60x1150	1460	± 100	248	240	860
15SJ53A1002	3600	600	3a	1795	560	2450	60x60x1150	1460	± 100	248	237	880
15SJ53A1003	3600	600	3a	2285	560	2940	60x60x1150	1460	± 100	248	225	980

Oil flow rate		
ISO	(L/min)	
	↔	↕
3	20	45

↕ Shifting
↕ Opening
↕ Closing



Please refer to our catalogue for further Special Equipment