


116.130 Bale Clamp with wavy edged arms

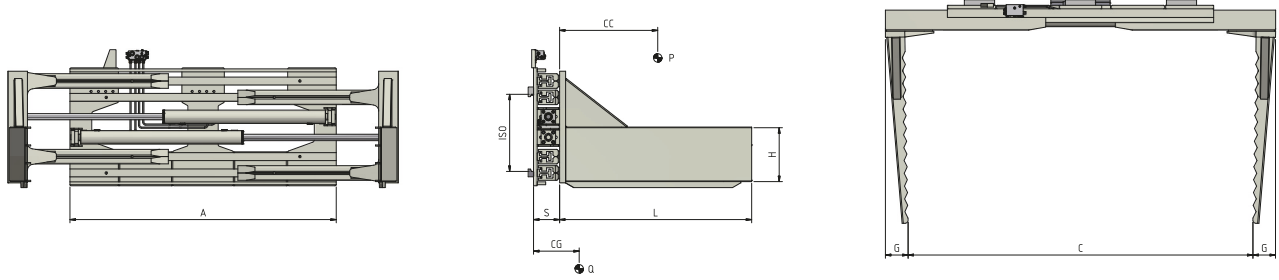

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

- Handling of voluminous loads of any type. • Adjustable clamping force with hydraulic valve. • Pressure Relief Valve. • Non-return Valve. • Regenerative Valve.


Special Equipment:

- Custom made widths/openings. • Custom made Blades. • Load Backrest. • Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11G08LL4A0001	5000	600	4	1600	500	2340	140x450x1200	165	172	1260
11G08LL4A0002	5000	600	4	1600	500	2340	140x450x1400	165	190	1310
11G08LL4A0003	5000	600	4	1600	500	2340	140x450x1600	165	230	1360
11G08LL4A0004	5000	600	4	1700	600	2640	140x450x1200	165	150	1310
11G08LL4A0005	5000	600	4	1700	600	2640	140x450x1400	165	185	1360
11G08LL4A0006	5000	600	4	1700	600	2640	140x450x1600	165	208	1410
11G08NC4A0001	6000	600	4	1600	500	2340	140x450x1200	170	165	1320
11G08NC4A0002	6000	600	4	1600	500	2340	140x450x1400	170	190	1370
11G08NC4A0003	6000	600	4	1600	500	2340	140x450x1600	170	226	1420
11G08NC4A0004	6000	600	4	1700	600	2640	140x450x1200	170	143	1370
11G08NC4A0005	6000	600	4	1700	600	2640	140x450x1400	170	178	1420
11G08NC4A0006	6000	600	4	1700	600	2640	140x450x1600	170	209	1470
11G08Q44A0001	7000	600	4	1800	480	2520	140x450x1200	198	178	1455
11G08Q44A0002	7000	600	4	1800	480	2520	140x450x1400	198	193	1505
11G08Q44A0003	7000	600	4	1800	480	2520	140x450x1600	198	218	1555
11G08Q44A0004	7000	600	4	2000	680	3120	140x450x1200	198	148	1645
11G08Q44A0005	7000	600	4	2000	680	3120	140x450x1400	198	180	1695
11G08Q44A0006	7000	600	4	2000	680	3120	140x450x1600	198	210	1745
11G08QZ4A0001	8000	600	4	1800	480	2520	150x450x1200	205	166	1505
11G08QZ4A0002	8000	600	4	1800	480	2520	150x450x1400	205	193	1555
11G08QZ4A0003	8000	600	4	1800	480	2520	150x450x1600	205	220	1605
11G08QZ4A0004	8000	600	4	2000	680	3120	150x450x1200	205	145	1725
11G08QZ4A0005	8000	600	4	2000	680	3120	150x450x1400	205	180	1775
11G08QZ4A0006	8000	600	4	2000	680	3120	150x450x1600	205	206	1825

Oil flow rate	
ISO	(L/min)
4	30

+||+ Clamping

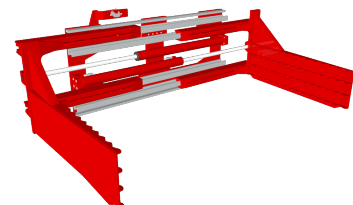

Please refer to our catalogue for further Special Equipment