


918 Triple Fork Positioner (1-2-3 Pallets)

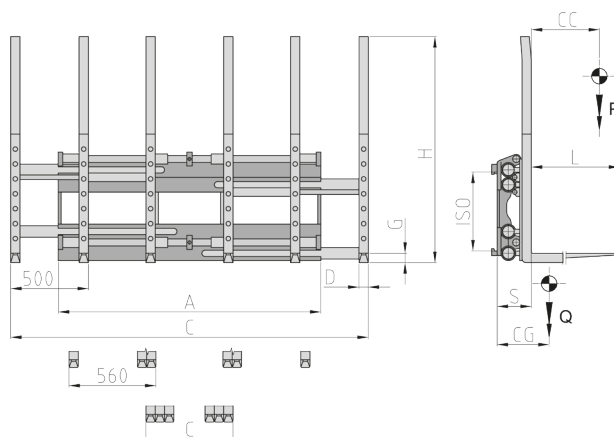

Hydraulic functions: 1 | Max working pressure: 200 Bar

Features:

- One, two or three pallets side by side.
- Smaller frame ease dimension.
- 6 bolt-on forks supplied with reinforced heel and load backrest, for easier replacement operations.
- Easier and safer manoeuvres, even in narrow spaces.


Special Equipment:

- Special widths and/or strokes.
- Custom made Forks.
- Custom made Load Backrest.
- Load Stabiliser with custom made dimensions/openings.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Carriage Width	Opening Range		Forks	Forks Height	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	DxGxL (mm)	H (mm)	S (mm)	CG (mm)	Q (kg)
15SH33A0001	3000	600	3a	1630	560	2285	60x50x1150	1460	209	198	715
15SH33A0002	3000	600	3a	1795	560	2450	60x50x1150	1460	209	218	760
15SJ53A0001	3600	600	3a	1630	560	2285	60x60x1150	1460	219	225	755
15SJ53A0002	3600	600	3a	1795	560	2450	60x60x1150	1460	219	217	815
15SJ53A0003	3600	600	3a	2285	560	2940	60x60x1150	1460	219	210	900

Oil flow rate	
ISO	(L/min)
3	45

↑ Opening
↓ Closing



Please refer to our catalogue for further Special Equipment