


474.IB7 Clamp with rubber covered arms

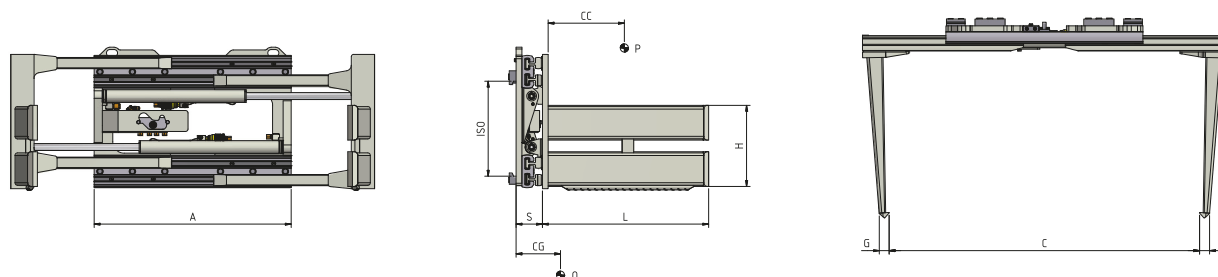

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

- Load handling without damaging the packaging. • Edged rubber covered Arms. • Adjustable clamping force with hydraulic valve. • Pressure Relief Valve.
- Non-return Valve. • Regenerative Valve.


Special Equipment:

- Custom made widths/openings. • Custom made Arms. • Load Backrest. • Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11L12AQ2A0001	1200	500	2	850	290	1330	40x350x900	109	171	250
11L12AQ2A0002	1200	500	2	950	390	1630	40x350x900	109	173	259
11L12AQ2A0003	1200	500	2	1050	490	1930	40x350x900	109	175	268
11L12BE2A0001	1400	500	2	950	310	1460	45x400x1000	137	187	367
11L12BE2A0002	1400	500	2	1050	410	1760	45x400x1000	137	187	383
11L12BE2A0003	1400	500	2	1150	510	2060	45x400x1000	137	184	399
11L12BE2A0004	1400	500	2	1250	410	1960	45x400x1000	137	183	411
11L12CG2A0001	1700	500	2	950	310	1460	45x400x1000	137	187	367
11L12CG2A0002	1700	500	2	1050	410	1760	45x400x1000	137	185	383
11L12D62A0001	1900	500	2	1050	280	1530	45x400x1000	137	181	396
11L12D62A0002	1900	500	2	1150	380	1830	45x400x1000	137	176	410
11L12D62A0003	1900	500	2	1250	480	2130	45x400x1000	137	173	422
11L12D62A0004	1900	500	2	1350	580	2430	45x400x1000	137	172	439
11L12EY2A0001	2400	500	3	1050	280	1530	45x400x1000	137	173	396
11L12EY2A0002	2400	500	3	1150	380	1830	45x400x1000	137	171	410

Oil flow rate	
ISO	(L/min)
2	20
3	25

• Clamping



Please refer to our catalogue for further Special Equipment