


474.I95 Foam Clamp

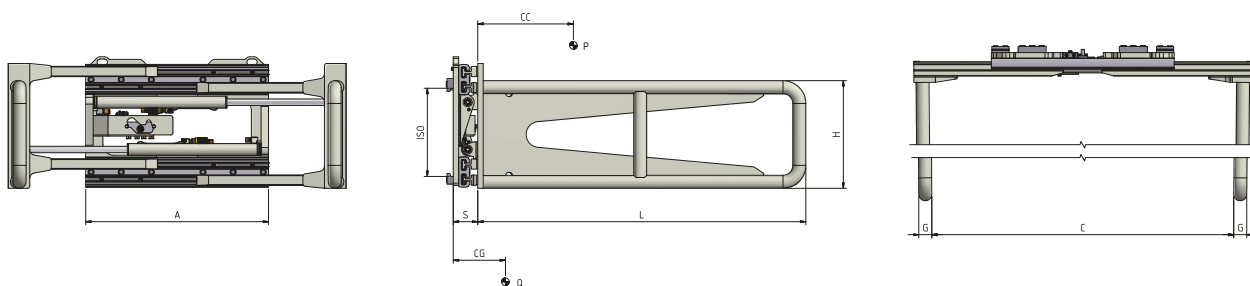

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

- Handling of voluminous loads (foam and polyurethane blocks).
- Tubular Arms.
- Adjustable clamping force with hydraulic valve.
- Pressure Relief Valve.
- Non-return Valve.
- Regenerative Valve.


Special Equipment:

- Custom made widths/openings.
- Custom made Arms.
- Load Backrest.
- Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11L27AQ2A0010	1200	500	2	1150	590	2150	65x500x1500	109	213	350
11L27AQ2A0011	1200	500	2	1150	580	2140	65x500x2000	109	232	400
11L27BE2A0009	1400	500	2	1150	580	2150	76x500x1500	137	246	433
11L27BE2A0010	1400	500	2	1150	570	2140	76x500x2000	137	273	472
11L27D62A0004	1900	500	2	1250	590	2260	76x500x1500	137	247	445
11L27D62A0005	1900	500	2	1250	580	2250	76x500x2000	137	271	500

Oil flow rate	
ISO	(L/min)
2	20

• Clamping



Please refer to our catalogue for further Special Equipment