


474.I2.I80 Box and Appliances Clamp with two pivoting arms

NEW ELECTRONIC CONTROL SYSTEM AVAILABLE

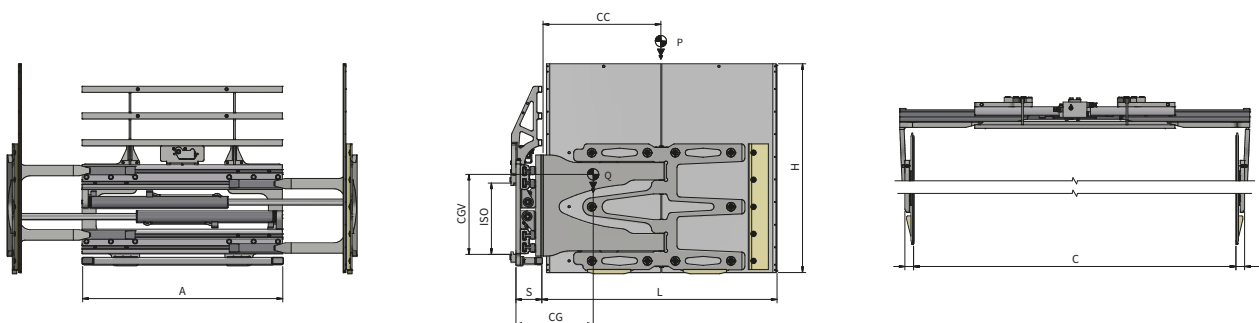

► Up to 12 Appliances or Cartons in one grab.

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

• Handling of Household Appliances and Cartons, arranged in double depth, on more rows/levels. • Pivoting rubber covered Arms. • Adjustable clamping force with hydraulic valve. • Pressure Relief Valve. • Non-return Valve. • Regenerative Valve. • Load backrest for clamps with arms exceeding 1000 mm in height.

Special Equipment:


• Custom made widths/openings. • Custom made Arms. • Load backrest extensions and upper-blades restraint structures. • Single or double wing. • Mechanical block of the oscillation. • Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Vertical Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	CGV (mm)	Q (kg)
11L15AQ2A0039	1200	500	2	950	500	1740	51x1000x1000	149	385	297	328
11L15AQ2A0041	1200	650	2	950	500	1740	51x1000x1300	149	405	300	378
11L15AQ2A0043*	1200	675	2	950	500	1740	51x1200x1350	149	431	323	517
11L15AQ2A0045	1200	500	2	1050	500	1840	51x1000x1000	149	323	297	437
11L15AQ2A0047	1200	650	2	1050	500	1840	51x1000x1300	149	411	300	487
11L15AQ2A0049*	1200	675	2	1050	500	1840	51x1200x1350	149	437	322	523
11L15AQ2A0051	1200	500	2	1150	450	1850	51x1000x1000	149	332	298	425
11L15AQ2A0053	1200	650	2	1150	450	1850	51x1000x1300	149	421	301	475
11L15AQ2A0055*	1200	675	2	1150	450	1850	51x1200x1350	149	443	321	530

* Split Contact Pads and Load Backrest on blade

Oil flow rate	
ISO	(L/min)
2	20

► Clamping



Please refer to our catalogue for further Special Equipment