


343 SM Roll Clamp with 90° forward tipping and adjustable arms

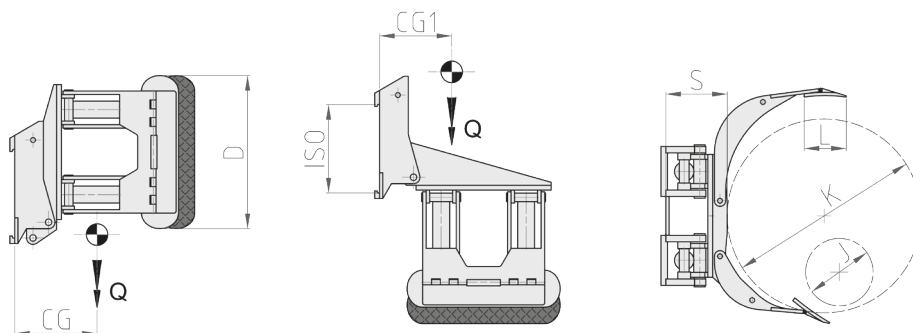

Hydraulic functions: 2 | Max working pressure: 175 Bar

Features:

- Short adjustable arm and long entire arm.
- 90° frontal tipping to take rolls lying perpendicularly to the Forklift.


Special Equipment:

- Custom made capacities/openings.
- Custom made Contact Pads.
- Rotating or Fixed Clamp with parallel arms with reduced dimensions for container loading/unloading operations.

Article	Attachment Capacity	ISO	Rolls Diameter		Contact Pads	Thickness	Centre of Gravity	Centre of Gravity	Weight
N°	P (kg)	2328	J (mm)	K (mm)	DxL (mm)	S (mm)	CG (mm)	CG1 (mm)	Q (kg)
21K012G2C0001	900	2	250	1100	700x200	235	220	325	560
21K012G2C0002	900	2	250	1400	700x200	235	225	345	610
21K012Q2C0001	1300	2	250	1150	750x250	235	240	365	640
21K012Q2C0002	1300	2	250	1300	750x250	235	245	375	665
21K01342C0001	2000	2	250	1300	850x250	250	255	405	780
21K01343C0001	2000	3	250	1300	850x250	265	255	405	850
21K01343C0002	2000	3	250	1600	850x250	265	260	425	900
21K013G3C0001	2600	3	300	1300	900x250	300	265	435	1040
21K013G3C0002	2600	3	480	1600	900x250	300	275	465	1095
21K013Q3C0001	3000	3	250	1300	1015x300	310	280	460	1120
21K013W4C0001	3600	4	480	1800	1050x300	320	285	510	1545

Oil flow rate		
ISO	(L/min)	
	→ ←	↻
2	25	20
3	30	20
4	35	25

→||← Clamping
↻ Tipping



Please refer to our catalogue for further Special Equipment