


364 Roll Clamp with reduced heights

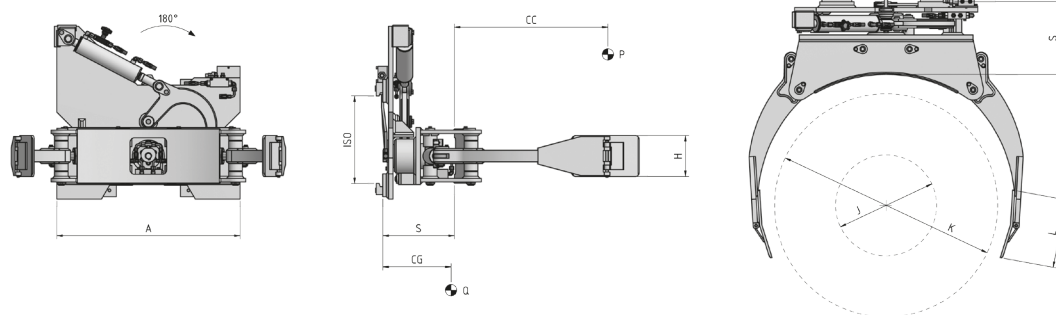

Hydraulic functions: 2 | Max working pressure: 175 Bar

Features:

- Handling of Rolls with reduced heights (rolls of tape, sticky labels and packaging cartons for Food Industry).
- 90°/180°/360° rotation.

Special Equipment:


- Custom made capacities/openings.
- Custom made Contact Pads.
- Rotating or Fixed Clamp with parallel arms with reduced dimensions for container loading/unloading operations.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Rotation	Carriage Width	Rolls Diameter		Contact Pads	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	R (n°)	A (mm)	J (mm)	K (mm)	HxL (mm)	S (mm)	CG (mm)	Q (kg)
73AF022	400	625	2	90	800	300	1250	160x200	350	236	295
73AF023	400	625	2	180	800	300	1250	180x300	350	236	300
73AF029	500	600	2	360	620	300	1200	180x300	310	260	330

Oil flow rate

ISO	(L/min)	
	→ ←	↻
2	25	15

→||← Clamping
↻ Rotation



Please refer to our catalogue for further Special Equipment