


474.181 Box and Appliances Clamp with fixed arms

NEW ELECTRONIC CONTROL SYSTEM AVAILABLE

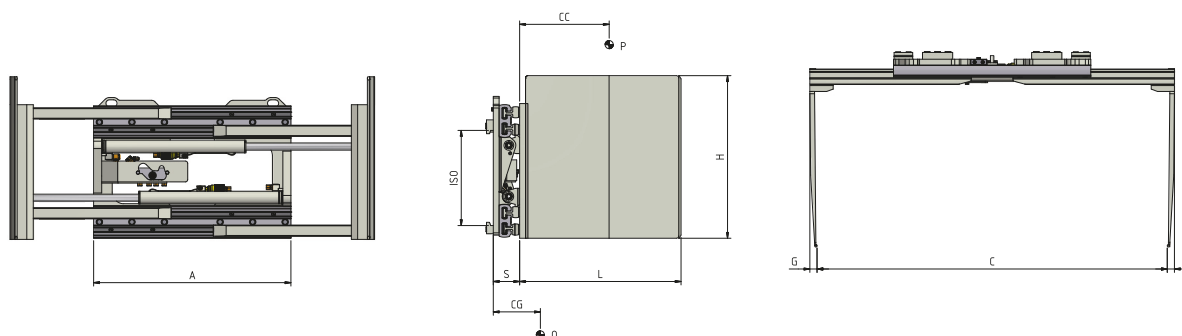

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

• Handling of Household Appliances and Cartons, arranged in double depth, on more rows/levels. • Fixed rubber covered Arms. • Adjustable clamping force with hydraulic valve. • Pressure Relief Valve. • Non-return Valve. • Regenerative Valve. • Load backrest for clamps with arms exceeding 1000 mm in height.


Special Equipment:

• Custom made widths/openings. • Custom made Arms. • Load Backrest. • Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11L14AQ2A0001	1200	500	2	950	580	1820	30x600x650	134	188	320
11L14AQ2A0002	1200	500	2	950	580	1820	30x700x650	134	201	335
11L14AQ2A0003	1200	500	2	950	580	1820	30x600x750	134	220	335
11L14AQ2A0004	1200	500	2	950	580	1820	30x700x750	134	234	350
11L14AQ2A0005	1200	500	2	950	580	1820	30x600x850	134	253	355
11L14AQ2A0006	1200	500	2	950	580	1820	30x700x850	134	268	370
11L14BE2A0001	1400	500	2	1050	590	1940	30x600x650	162	188	455
11L14BE2A0002	1400	500	2	1050	590	1940	30x700x650	162	201	477
11L14BE2A0003	1400	500	2	1050	590	1940	30x600x750	162	218	470
11L14BE2A0004	1400	500	2	1050	590	1940	30x700x750	162	232	494
11L14BE2A0005	1400	500	2	1050	590	1940	30x600x850	162	250	498
11L14BE2A0006	1400	500	2	1050	590	1940	30x700x850	162	266	516

Oil flow rate	
ISO	(L/min)
2	20

• Clamping



Please refer to our catalogue for further Special Equipment