


474.160 Drum Clamp for one or two Drums

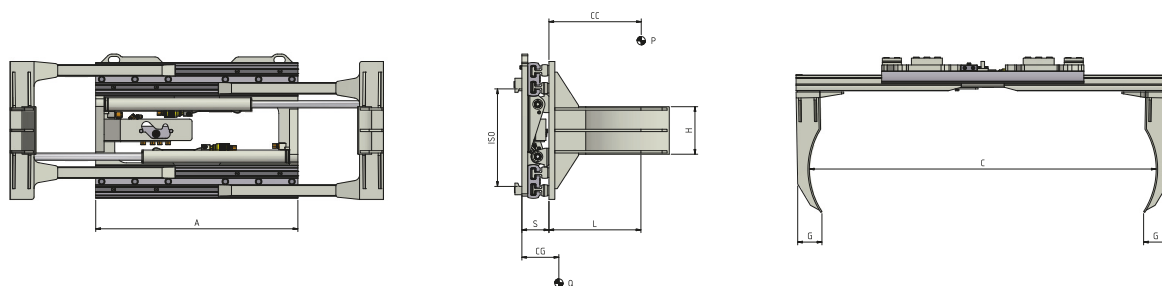

Hydraulic functions: 1 | Max working pressure: 175 Bar

Features:

- Handling of 1 or 2 Drums at once.
- Adjustable clamping force with hydraulic valve.
- Pressure Relief Valve.
- Non-return Valve.
- Regenerative Valve.

Special Equipment:


- Custom made widths/openings.
- Custom made Blades.
- Load Backrest.
- "V" shaped Plates for gripping drums with different diameters.
- Sideshifting Valve or Semi-Integral Sideshift.

Article	Attachment Capacity	Load Centre of Gravity	ISO	Frame Width	Opening Range		Blades	Thickness	Centre of Gravity	Weight
N°	P (kg)	CC (mm)	2328	A (mm)	C Min (mm)	C Max (mm)	GxHxL (mm)	S (mm)	CG (mm)	Q (kg)
11L23AQ2C0001	1200	500	2	950	490	1730	100x200x330	109	102	230
11L23BE2C0001	1400	500	2	950	450	1600	100x200x330	137	109	316

Oil flow rate

ISO	(L/min)
	±1%
2	20

±1% Clamping



Please refer to our catalogue for further Special Equipment